


SUPPORTED VIDEO FORMATS

According on SONY FCB model	HDSDI output	Analog HD output
HD SDI 1080p25 , 1080p30	✓	✓
HD SDI 1080i50, 1080i60	✓	✓
HD SDI 720p50, 720p60	✓	✓

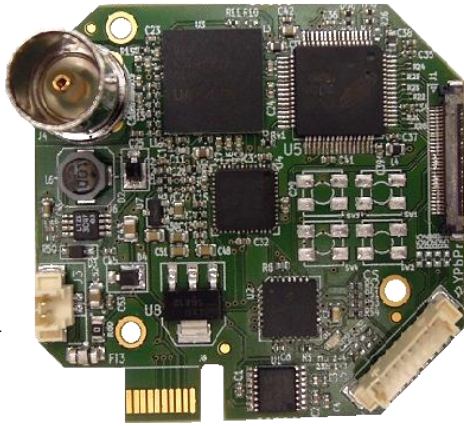

HDSDI Digital video output.

TTL or RS232 VISCA dialog level.

5VDC to 12 VDC protected power supply for interface and camera

Key switches for camera functions management.

Power	FCB EH	SE 600
1	12 VDC	5V
2	GND	GND

	Functions (fact setting)	Option
1	GND	GND
2	TXD (RS232 VISCA)	TXD
3	RXD (RS232 VISCA)	RXD
4	ZOOM TELE	VBS out
5	ZOOM-WIDE	Y out
6	USER DEFINED	Pb out
7	SAVE PRESET	Pr out
8	GND	GND

Functions	Specifications
Camera control	RS232 , RX , TX , VISCA 4 GPIO for Zoom , focus and preset activation
Power	EH serie 12VDC, 4 W (including camera),SE 600 5VDC, 3 W
Environnemental	0°C to 60°C
Storage	-20°C to 60°C
Dimensions (mm)	48 (H)x 46 (L)x 18 (P)

HDSDI Conversion module for SONY SE 600			
Product code	TV80 0020		
Content	Electronic board ref TV10 0018		
Digital camera link	USL20-30SS-005-C Cable assembly		
Power input wires	2 ways harness, 200mm length for power connector		
Analog HD output wires	8 ways harness, 200mm length for communication signal connector		
HDSDI Connector Options	TV80 0020	TV80 0020-SMB	TV80 0020-MCX